




# let the air do the work!

With Ringfeder new unique coupling, 5050 AM/RL, you will uncouple your trailer in no time. And it is easy. Just insert the air hose to the trailer air supply and the air will do the work for you ...

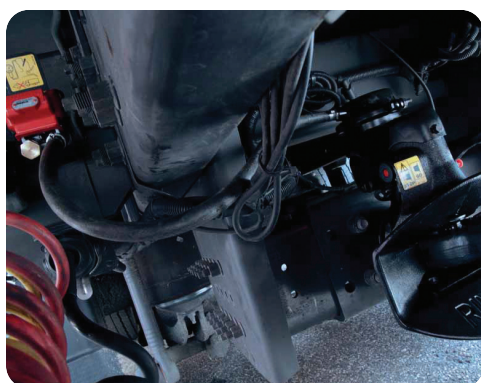

## How it works:

To open Ringfeder 5050 AM/RL, remove the air hose from the holder and insert it into the trailer air supply. Once it's done, the air will stream into the AM mechanism and release the coupling pin, with a power of 3kN.

If the coupling pin won't come away at your first attempt, just go back to your vehicle, and slightly move the trailer eye to release the tension. When the pin has found the right position it will open up. It is important that you remove the air hose from the trailer air supply and put it back in its holder since the vehicle should not be driven with the air hose connected to the trailer air supply.



## An all-round solution:

Ringfeder 5050 AM/RL is compatible with all types of couplings:



Duomatic



C-coupling



Palm

The advantage of using Ringfeder's 5050 AM/RL coupling system is that all products work together. All parts are developed and manufactured with exceptional demands of quality, reliability, safety and cost effectiveness.

Talk to your local Gough Transpecs or Gough TWL team member to find out more.